

# PS1200 C-SJ8-5

## Solar submersible pump system for 4" wells

### Applications

- Drinking water supply
- Pond management
- Irrigation
- Livestock watering
- Pressurizing systems


### Characteristics


- Fast, failure-free installation
- Excellent serviceability
- High reliability and life expectancy
- Short Return of Investment (ROI) cycle
- Lower Total Cost of Ownership (TCO)

### Technical data

Total dynamic head	max. 80 ft
Flow rate	max. 60 USG/min
Vmp*	> 102 V
Voc	max. 200 V

### Standards

 2006/42/EC, 2004/108/EC, 2006/95/EC

 UL 508, 778, 1004  
CSA C22.2 No. 14, 100, 108

The logos shown reflect the approvals that have been granted for this product family. Products are ordered and supplied with the approvals specific to the market requirements.



### Components

#### Controller: PS1200

- Controlling and monitoring
- Control inputs for dry running protection, remote control etc.
- Protected against reverse polarity, overload and overtemperature
- Integrated MPPT (Maximum Power Point Tracker)
- Low voltage disconnect for battery operation

#### Motor: ECDRIVE 1200-C

- Maintenance-free brushless DC motor
- Water filled
- No electronics in the motor
- Submersion max. 820 ft, IP68

#### Pump end: PE C-SJ8-5

- High reliability and life expectancy
- Non-return valve
- Premium materials
- Optional: dry running protection




## PS1200 C-SJ8-5

Solar submersible pump system for 4" wells

### Pump chart


Vmp\* > 102 V

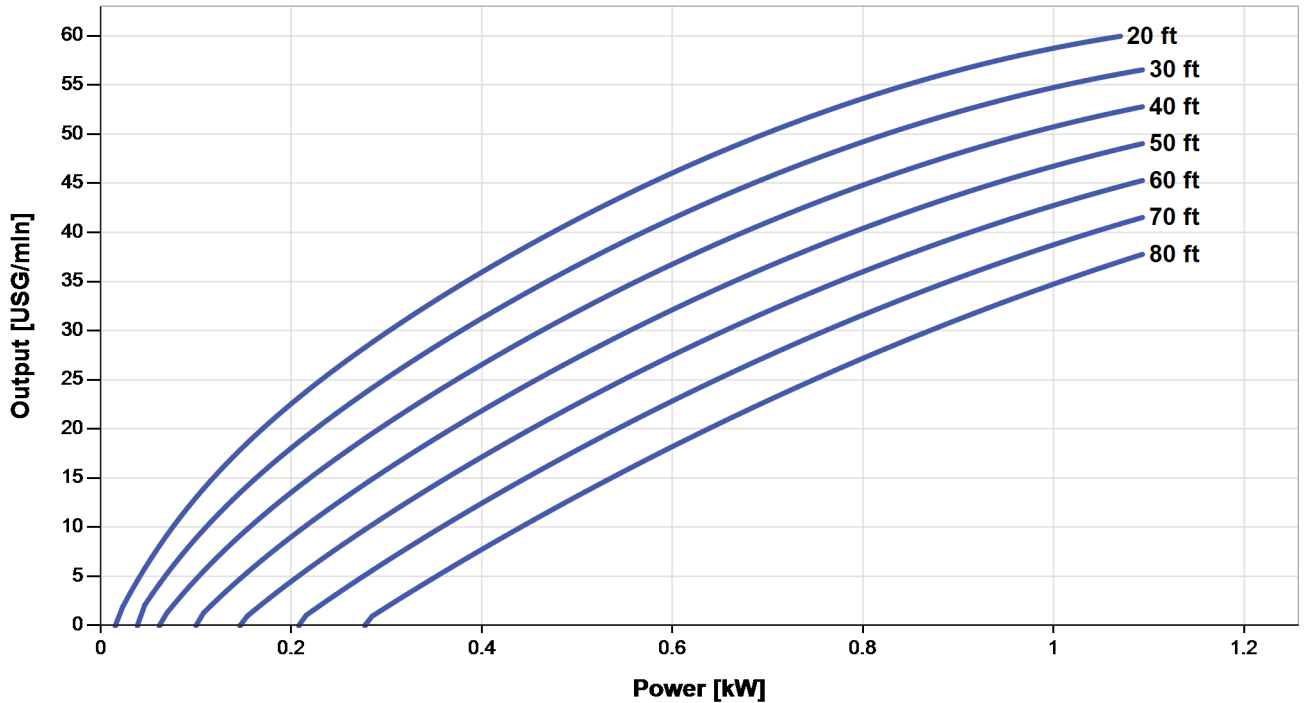

### Dimensions and weights


#### Controller

H = 16 in  
 H2 = 14 in  
 W1 = 7.0 in  
 W2 = 6.1 in  
 W3 = 4.6 in  
 D = 6.5 in  
 D1 = 5.9 in

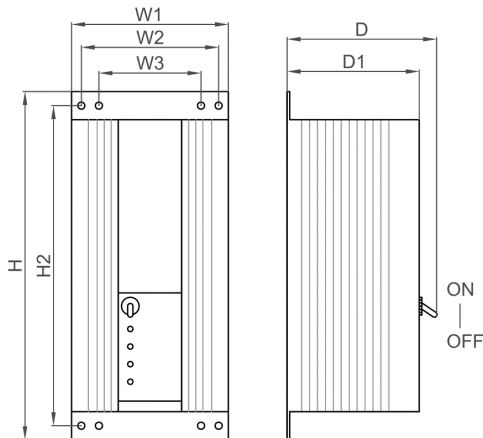

#### Pump unit

A = 24 in  
 B = 7.3 in  
 C = 16 in  
 D = 3.8 in  
 E = 3.9 in  
 S = 2 in

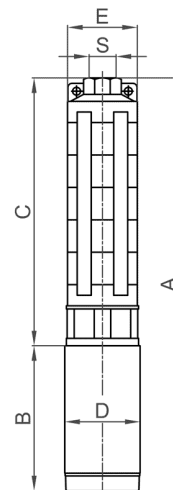

	Net weight
Controller	9.9 lbs
Pump unit	28 lbs
Motor	15 lbs
Pump end	13 lbs

\*Vmp: MPP-voltage under Standard Test Conditions (STC): 1000 W/m<sup>2</sup> solar irradiance, 25 °C cell temperature

