

PS15k C-SJ150-1

Solar submersible pump system for 8" wells

Applications

- Drinking water supply
- Pond management
- Irrigation
- Livestock watering
- Pressurizing systems

Characteristics

- Fast, failure-free installation
- Excellent serviceability
- High reliability and life expectancy
- Short Return of Investment (ROI) cycle
- Lower Total Cost of Ownership (TCO)

Technical data

Total dynamic head	max. 50 ft
Flow rate	max. 1,020 USG/min
Vmp*	> 500 V
Voc	max. 800 V

Standards

CE 2006/42/EC, 2004/108/EC, 2006/95/EC

The logos shown reflect the approvals that have been granted for this product family. Products are ordered and supplied with the approvals specific to the market requirements.



Components

Controller: PS15k

- Controlling and monitoring
- Control inputs for dry running protection, remote control etc.
- Protected against reverse polarity, overload and overtemperature
- Integrated MPPT (Maximum Power Point Tracker)
- Data logger

Motor:

- Highly efficient 3-phase AC motor
- Frequency 50 Hz
- No electronics in the motor
- Submersion max. 984 ft, IP68

Pump end: PE C-SJ150-1

- High reliability and life expectancy
- Non-return valve
- Premium materials
- Optional: dry running protection




PS15k C-SJ150-1

Solar submersible pump system for 8" wells

Pump chart



Vmp* > 500 V

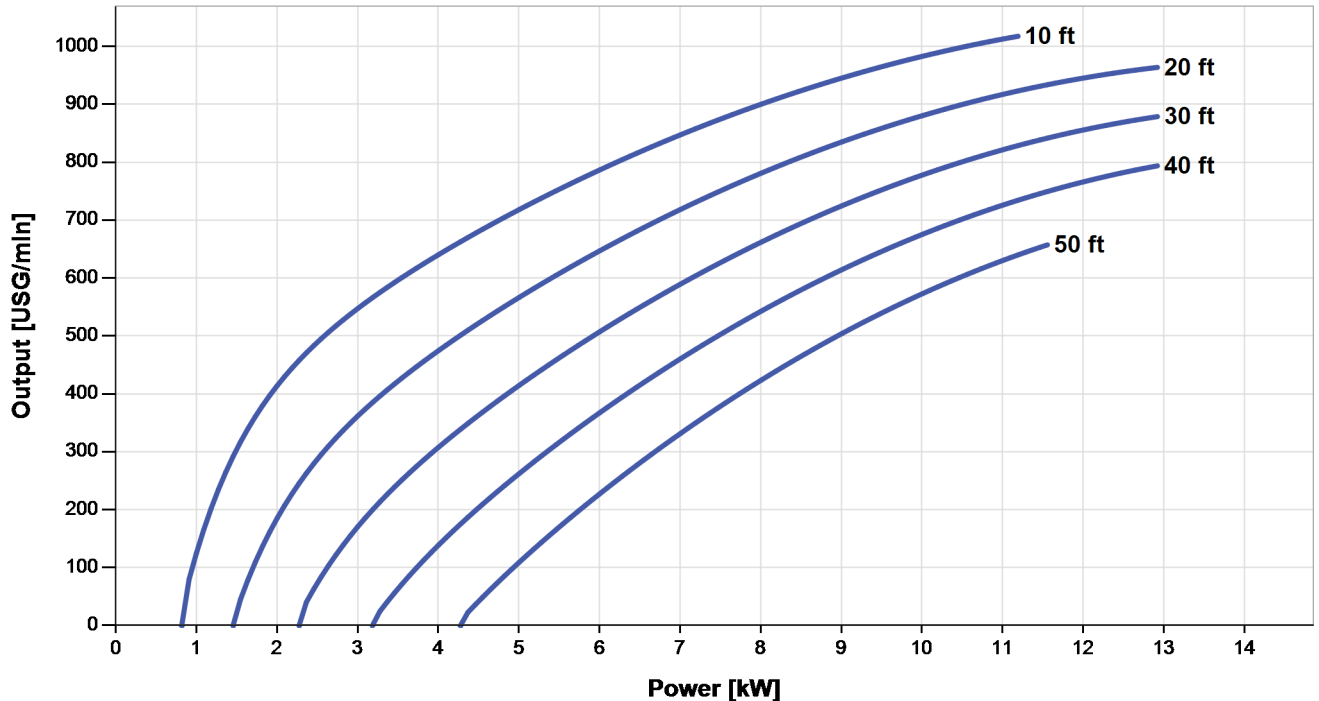

Dimensions and weights


Controller

H = 14 in
 H1 = 12 in
 H2 = 12 in
 W = 9.8 in
 W1 = 9.3 in
 D = 7.9 in
 D1 = 7.9 in
 D2 = 6.6 in



Pump unit

A = 56 in
 B = 28 in
 C = 28 in
 D = 5.4 in
 E = 9.1 in
 S = 6 in

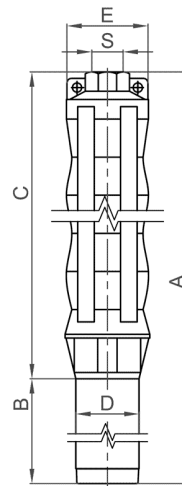

	Net weight
Controller	20 lbs
Pump unit	230 lbs
Motor	128 lbs
Pump end	102 lbs

*Vmp: MPP-voltage under Standard Test Conditions (STC): 1000 W/m² solar irradiance, 25 °C cell temperature

